


NOTES:

- 1) EXACT MOUNTING DETAILS TO BE DETERMINED AT JOBSITE BY OTHERS.
- 2) CALCULATIONS DO NOT SHOW THE EFFECT OF SHADOWING CAUSED BY OBJECTS WITHIN THE AREA.

**BASEBALL TYPICAL
PONY LEAGUE
CLASS II, 6 OUTFIELD POLES
250' RADIUS, 75' BASELINE
REF. NO. BASEII625075**

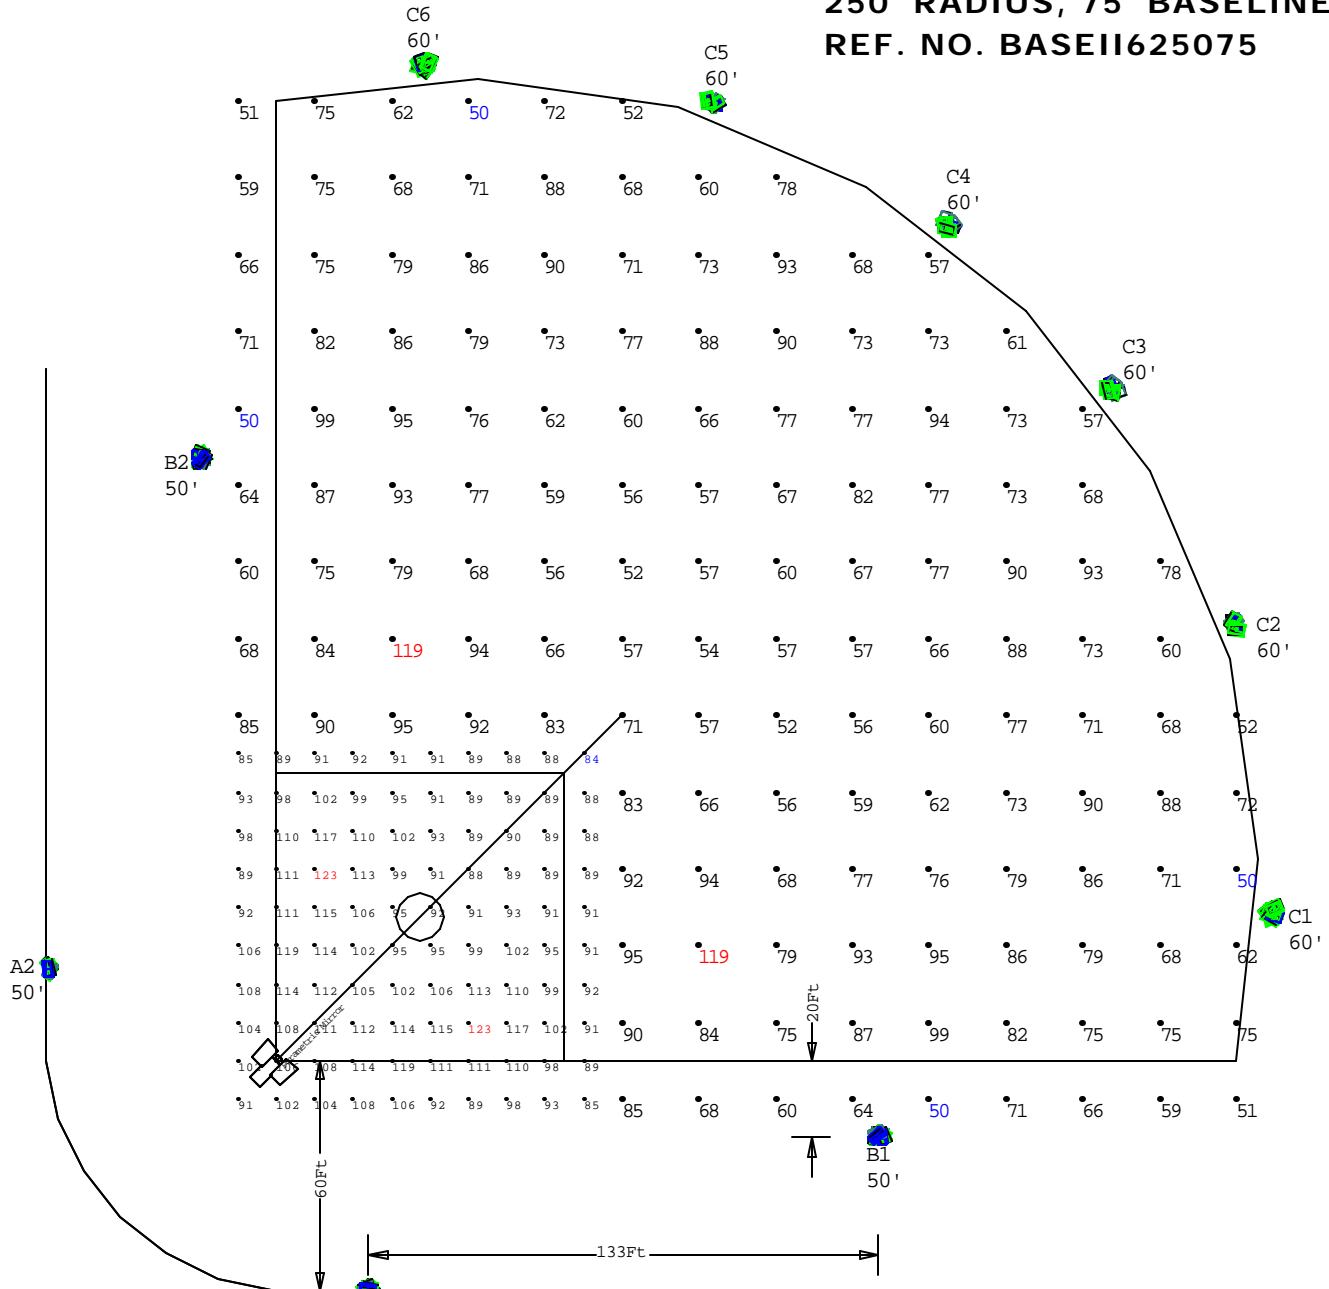

Luminaire Schedule						
Project: All Projects						
Symbol	Qty	Label	Description	Lumens	LLF	Filename
■	52	F2	9000-VN-1000MH	110000	0.720	1kmh3030.ies
■	74	F3	9000-VM-1000MH	110000	0.720	9000VM1000MH.IES
■	12	F6	9000-VW-1000MH	110000	0.720	9000VW1000MH.IES

Numeric Summary - Basic										
Project: All Projects										
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	# Pts	CV	Description
Outfield	Illuminance	Fc	73.50	119	50	1.47	2.38	144	0.16	3' above grade
Infield	Illuminance	Fc	99.77	123	84	1.19	1.46	100	0.10	3' above grade

View_1:Plan Rotated 0 Tilted 0
Scale: 1 inch= 50 Ft.



ABS LIGHTING- This layout provided using manufacturer's photometrics. Variations between installation and this layout will result in variations from footcandle levels shown.

Fixture Breakdown per Pole

File: BASEI1625075

9000-XS-1000MH	9000-VN-1000MH	9000-VM-1000MH	9000-VW-1000MH
F1	F2	F3	F6

Pole	Mtg. Ht.				
A1	50		7	10	1
B1	50		10	10	2
B2	50		10	10	2
C1	60		1	9	
C2	60		4	4	1
C3	60		4	4	2
C4	60		4	4	2
C5	60		4	4	1
C6	60		1	9	
Total			45	64	11