


**NOTES:**

- 1) EXACT MOUNTING DETAILS TO BE DETERMINED AT JOBSITE BY OTHERS.
- 2) CALCULATIONS DO NOT SHOW THE EFFECT OF SHADOWING CAUSED BY OBJECTS WITHIN THE AREA.

**BASEBALL TYPICAL  
YOUTH LEAGUE  
CLASS III, 4 OUTFIELD POLES  
180' RADIUS, 60' BASELINE  
REF. NO. BASEIII418060**

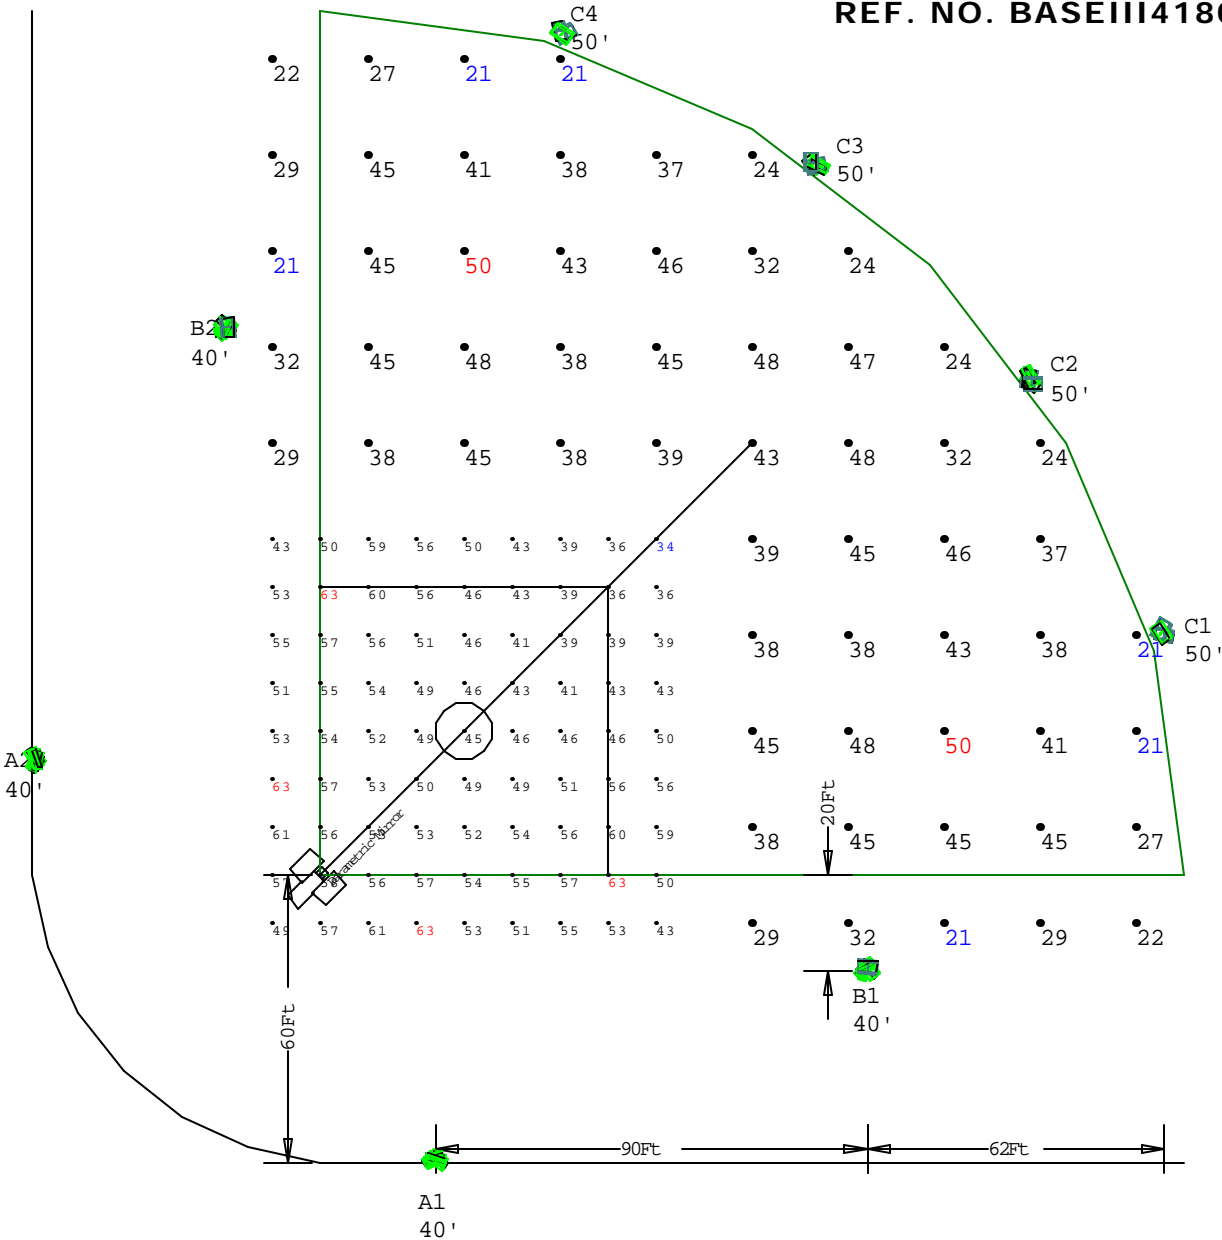

Luminaire Schedule						
Project: All Projects						
Symbol	Qty	Label	Description	Lumens	LLF	Filename
[Symbol]	28	F3	9000-VM-1000MH	110000	0.720	9000VM1000MH.IES
[Symbol]	10	F6	9000-VW-1000MH	110000	0.720	9000VW1000MH.IES

Numeric Summary - Basic										
Project: All Projects										
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	# Pts	CV	Description
outfield	Illuminance	Fc	36.41	50	21	1.73	2.38	58	0.20	readings taken at 3' afg
infield	Illuminance	Fc	50.75	63	34	1.49	1.85	81	0.14	3' above grade

View\_1:Plan Rotated 0 Tilted 0  
Scale: 1 inch= 40 Ft.

ABS LIGHTING- This layout provided using manufacturer's photometrics. Variations between installation and this layout will result in variations from footcandle levels shown.



# Fixture Breakdown per Pole

File: BASEIII418060

9000-XS-1000MH	9000-VN-1000MH	9000-VM-1000MH	9000-VW-1000MH
F1	F2	F3	F6

Pole	Mtg. Ht.	F1	F2	F3	F6
A1	40			6	
A2	40			6	
B1	40			5	1
B2	40			5	1
C1	50			1	2
C2	50			2	2
C3	50			2	2
C4	50			1	2
<b>Total</b>				<b>28</b>	<b>10</b>